

GBU1002-12

Single Phase Rectifier Bridge

VRRM

200 to 1200V

ID

10 Amp

Features

- Glass passivated chip
- Ideal for printed circuit boards
- High surge current capability
- High temperature soldering guaranteed:265°C/10 seconds

Applications

- Single phase rectifiers for power supplies
- Rectifiers for DC motor field supplies
- Industrial automation equipment
- Input rectifiers for inverter

Module Type

Туре	V _{RRM}	V _{RSM}
GBU1002	200V	300V
GBU1004	400V	500V
GBU1006	600V	700V
GBU1008	800V	900V
GBU1010	1000V	1100V
GBU1012	1200V	1300V

Maximum Ratings

Symbol	Item	Conditions	Values	Unit
I _D	Output Current	Single Phase,Sin Full Wave T _c = 110°C	10	A
I _{FSM}	Surge Forward Current	$T_j = 25^{\circ}C, t = 50Hz(10ms), V_R = 0V$	200	А
l ² t	Circuit Fusing Consideration	t = 10ms T _j =25°C	200	A ² s
V _{ISO}	Isolation Breakdown Voltage	AC 50Hz/60Hz; R.M.S; 1min	2500	V
Ti	Operating Junction Temperature		-40 to +150	°C
T _{stg}	Storage Temperature		-40 to +150	°C
Ms	Mounting Torque	(Recommended torque:0.65 N·m)	0.8	N∙m
Weight	Module (Approximately)		4	g


Thermal Characteristics


Symbol	Item	Conditions	Values	Unit
R _{th(j-c)}	Thermal Impedance, Max	Junction to Case(Per Total)	2.0	°C/W
		Junction to Case(Per Diode)	8.0	°C/W

Electrical Characteristics

Symbol	Item	Conditions	Values			Unit
			Min.	Тур.	Max.	Unit
V _{FM}	Forward Voltage Drop, Max	T _j = 25°C I _F = 5A	_	—	1.0	V
	Repetitive Peak Reverse Current, Max	$T_j = 25^{\circ}C$ $V_R = V_{RRM}$	—	—	5	uA
		$T_j = 150^{\circ}C V_R = V_{RRM}$	—	—	0.5	mA
V _{T0}	Threshold Voltage, for power loss calculation only	T _j = 125°C	0.75		V	
r _T	Slope Resistance, for power loss calculation only	T _j = 125°C	16.0		mΩ	

1



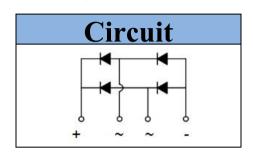



GBU1002-12

Performance Curves

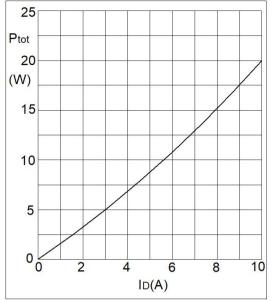


Fig1. Power Dissipation

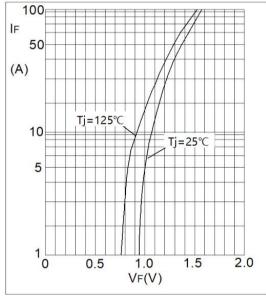


Fig3. Forward Characteristics

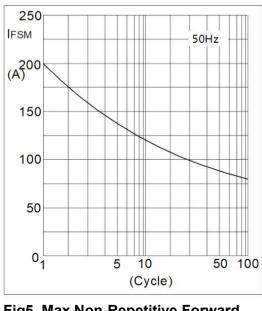


Fig5. Max Non-Repetitive Forward Surge Current

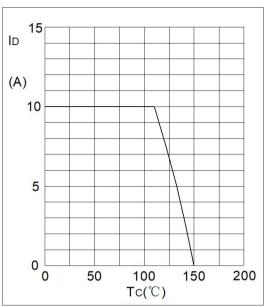


Fig2. Forward Current Derating Curve


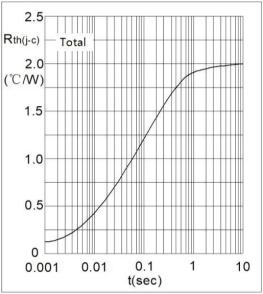


Fig4. Transient Thermal impedance



Package Outline Information



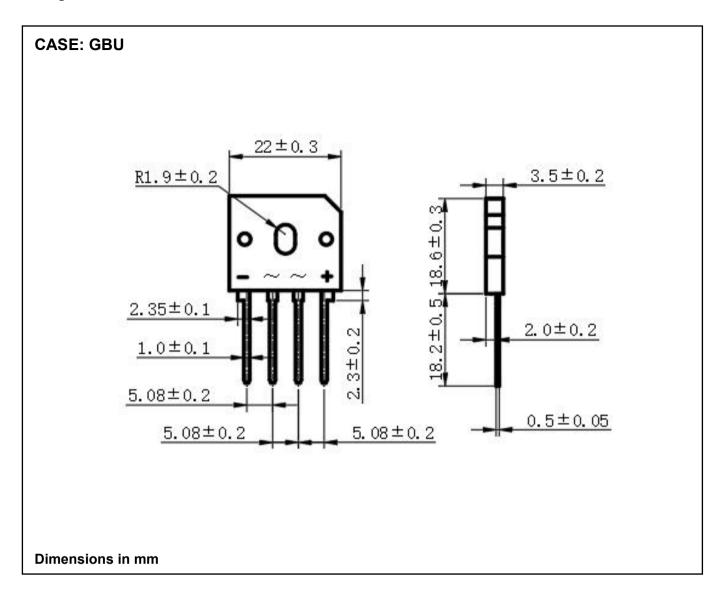

***IMPORTANT INFORMATION AND WARNINGS**

The specifications of Zhejiang Guchi Electronics Co., Ltd. products may not be considered as a guarantee or assurance of product characteristics. The specifications describe only the usual characteristics of products expected in typical applications, which may still vary depending on the specific application. Therefore, products must be tested for the respective application in advance, and application adjustments may be necessary. The user of our products is responsible for the safety of their applications embedding our products and must take adequate safety measures to prevent the applications from causing physical injury, fire, or other problems if any of our products become faulty. The user is responsible for ensuring that the application design complies with all applicable laws, regulations, norms, and standards. Except as otherwise explicitly approved by Zhejiang Guchi Electronics Co., Ltd. in a written document signed by authorized representatives, our products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

No representation or warranty is given, and no liability is assumed with respect to the accuracy, completeness, and/or use of any information herein, including without limitation, warranties of non-infringement of intellectual property rights of any third party. Zhejiang Guchi Electronics Co., Ltd. does not assume any liability arising out of the applications or use of any product; neither does it convey any license under its patent rights, copyrights, trade secrets, or other intellectual property rights, nor the rights of others. We make no representation or warranty of non-infringement or alleged non-infringement of intellectual property rights of any third party which may arise from applications. Due to technical requirements, our products may contain dangerous substances. For information on the types in question, please contact the nearest sales office. This document supersedes and replaces all information previously supplied and may be superseded by updates. We reserve the right to make changes.